

High Performance & Simplified Data Protection





DVR Storage Unit

SVS-5R

The SVS-5R is a high-capacity external storage device, to compliment Samsung Techwin's DVR range. The SVS-5R supports multiple RAID configurations, which offers enhanced data protection, as well as improved availability of data by distribution optimally across the disk array.

- High data transfer rate, up to 3.0 Gbps (SATA II)
- Install up to 4 SATA Hard Disks
- Choose from multiple RAID configurations
- Hot-swappable Disk Drive Bays
- Front LCD for RAID status display
- USB port for RAID configuration


DVR Storage Unit

SVS-5R



Dimensions Unit: mm (inch)





*RAID (Redundant Array of Independent Disks)

RAID technology employs storing redundant data across multiple disk drives to ensure storage reliability against possible data loss. A redundant array of two or more physical disk drives comprises a functional disk drive, the exact setup of which categorizes it into one of the several levels of RAID configurations. RAID 5 is the most common implementation of RAID schemes; it offers a balance of robust data protection and storage capacity by ensuring data integrity against the failure of one physical disk drive.

- RAID 0: Distributed data storage for increased access speed and larger storage capacity.
- RAID 1: Each physical disk has its own twin, providing high degree of reliability and increased storage capacity.
- RAID 0+1: A combination of RAID 0 and RAID 1 configurations.
- RAID 5: Data is distributed across three or more disk drives; data recovery is ensured in the event of one disk failure.



The Ecomark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.


Specifications

	SVS-5R
Transmission Speed	Up to 3.0Gbps (SATA II)
Maximum Capacity	Up to 4TB
Internal HDD	Up to 4 SATA HDDs (Support Hot-Swap Function)
RAID	RAID 0, 1, 0+1, 5
eSATA	1 External SATA ports for DVR connection
USB	USB 2.0, RAID configuration only
Operating Temperature	+5°C ~ +45°C (+41°F ~ +113°F)
Operating Humidity	20%RH ~ 70%RH
Input Voltage	115 ~ 230V AC ±10%, 50/60 Hz, Autoranging
Dimensions (WxHxD)	482 x 44 x 433mm (18.97" x 1.73" x 17.04")
Weight (4X hard disks)	Approx. 6.4Kg (14.1 lb)
Rack Mount Kit	For mounting one unit in an EIA 19-inch rack
Supported Devices	SVR-3200/1680/1660/1645/960/945
Certifications	FCC (Class A), UL/cUL listed, CE (Class A)

Component Names



DVR Connection

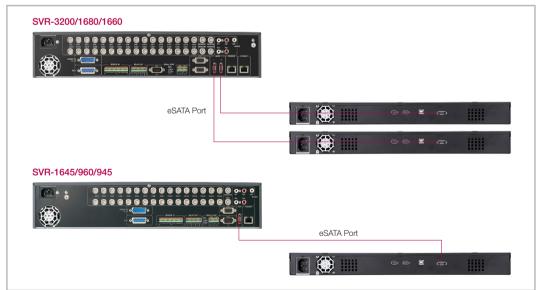

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN CO., LTD.

145-3, Sangdaewon 1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, KOREA 462-703 Tel: +82-31-740-8151~8 / Fax: +82-31-740-8145 www.samsunacctv.com

SAMSUNG TECHWIN AMERICA Inc.

1480 Charles Willard St, Carson, CA 90746, UNITED STATES Tol Free: +1-877-213-1222 / Fax: +1-310-632-2195 www.samsungcctvusa.com

SAMSUNG TECHWIN EUROPE CO., LTD. Samsung House, 1000 Hillswood Drive, Hillswood Business Park Chertsey, Surrey, UNITED KINGDOM KT16 OPS Jingang Road, Tianjin, P.R. CHINA 300385
Tel: +44-1932-45-5300 / Fax: +44-1932-45-5325 Tel: +86-22-23887788 / Fax: +86-22-23887788

TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD. No.11 Wei 6 Street. Micro-Electronic Industrial Park

