# raylux warrior ATEX & IECEX APPROVED




The RAYLUX Warrior II series of ATEX and IECEx approved explosion protected WL illuminators have been designed for hazardous environments which require high performance night-time illumination. RAYLUX Warrior illuminators are supplied in an aluminium housing with toughened glass front window and are rated for all Zone 1 and Zone 2 applications.

The Warrior series WL illuminators provide class leading performance, long life and ultra low maintenance. They incorporate the very latest surface mount LEDs to deliver excellent night-time pictures with improved optical output and outstanding reliability.

Each unit is fitted with a Cool Running<sup>™</sup> thermal management system to carefully control LED output and delivers a projected working life of 10 years. Compared to traditional bulb solutions Warrior SMT LED illuminators produce very little heat and deliver highly even illumination beam patterns.

RAYLUX Warrior illuminators are supplied with an integrated power supply. The RAYLUX Warrior series is suitable for all low light installations up to 120 metres (394ft).

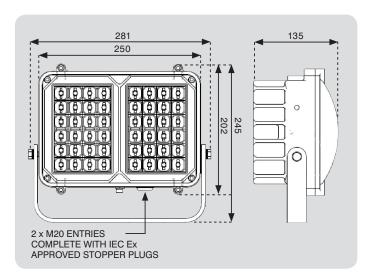



# **POWERFUL**

- Distances up to 120m (394ft)
- Latest LED technology
- High power Low running costs

# **FLEXIBLE**

- Various Angles (10° 120°)
- Input 110-230V
- Zero maintenance required

#### RELIABLE

- 10 year life
- Cool Running<sup>™</sup> thermal management system
- Marine grade aluminium housing with glass window

# CONTROLLED

- Suitable for Zone 1 and Zone 2 hazardous environments
- Certification II 2GD Ex emb II
- ATEX and IECEx approved
- Even Output Illumination















#### **PLATINUM ADVANCED SMT LED TECHNOLOGY**

PLATINUM illuminators integrate cutting-edge SMT LED technology, light intensification miniature optics (LIMO) and an enhanced Cool Running™ thermal management system into a single ultra high performance LED. The result is World leading power, reliability and flexibility.



#### **ACTIVE LED LIFE CONTROL**

All Raytec illuminators employ cutting edge materials science techniques to improve thermal efficiency throughout the unit and ensure continuity of LED power. The New Advanced Cool Running™ system draws heat away from the LEDs, shielding the LED from abnormal stress, and allows Raytec LED products to deliver outstanding performance and consistency of illumination throughout the operational life of the illuminator.



#### **VANDAL RESISTANT**

The polycarbonate lens design protects against severe blows from crowbars, baseball bats and can even withstand successive shots from air pistols and rifles (range dependant).



# **ENERGY SAVING**

All Raytec illuminators use high efficiency LED's and advanced control methods to deliver extremely low electrical consumption. Raytec illuminators are energy saving and deliver huge savings in running costs compared to traditional bulb illuminators



#### HIGH DEFINITION LIGHTING

High Definition Lighting allows cameras to provide crystal clear, high signal images during the hours of darkness. The breakthrough in HD lighting is made possible with Raytec's high power LED technology delivering increased power on scene.

# **3 YEAR WARRANTY**

All Raytec CCTV illuminators are provided with a 3 year warranty, unmatched anywhere in the CCTV lighting industry. Raytec illuminators provide guaranteed long life!



# TECHNICAL SPECIFICATIONS

#### **ILLUMINATOR & INTEGRATED PSU**

Max Distance: up to 120m (394ft)

Angle: 10, 30, 50 or 120 degrees

SMT LED's Optics: Consumption: 110-240V AC Input:

Approx. 0.3A Internally fused

Voltage: 13.5V current controlled

Weight: <5kg (11lbs)

Zone 1 & 2 Hazardous Environments Ex emb II T4/T5/T6 ATEX EEd Rating:


IP Rating:

-50 to +50°C (-58 to 122°F) Temp Range:

Cable Length: 2.7m Colour: Silver White-Light Wavelenath: Dimensions: 300 x 200 x 125mm 12" x 8" x 5" approx

### **BRACKETRY**

Wall Mount Bracket included.



# PART CODES & DISTANCES

RLW-200-10 RAYLUX Warrior, 10° White-Light 120m (394ft) White-Light 65m (213ft) 45m (184ft) RLW-200-30 RAYLUX Warrior, 30° RLW-200-50 White-Light RAYLUX Warrior, 50° RAYLUX Warrior, 120° RLW-200-120 White-Light 18m (59ft)



Tel: +44 (0) 1670 520055 Tel: +1 888 505 8335 Europe / Middle East: Americas (Toll Free):

Email: sales@rayteccctv.com Email: ussales@rayteccctv.com Web: www.raytecctv.com